

## HEWLETT-PACKARD COMPANY

Intellectual Property Administration  
P. O. Box 272400  
Fort Collins, Colorado 80528-9599

PATENT APPLICATION

ATTORNEY DOCKET NO. 10992482-1

IN THE U.S. PATENT AND TRADEMARK OFFICE  
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design☒ original patent application,☐ continuation-in-part application

INVENTOR(S): Bin Zhang, et al.

TITLE: Aggregated Clustering Method and System

Enclosed are:

- ☒ The Declaration and Power of Attorney. ☐ signed ☒ unsigned or partially signed  
☒ 4 sheets of drawings (one set) ☐ Associate Power of Attorney  
☐ Form PTO-1449 ☐ Information Disclosure Statement and Form PTO-1449  
☐ Priority document(s) ☐ (Other) (fee \$ )

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	15 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	2 — 3	0	X \$78	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$ 0
BASIC FEE: Design \$310.00 ); Utility \$690.00 )				\$ 690
TOTAL FILING FEE				\$ 690
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 690

Charge \$ 690 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL188087829USDate of Deposit 10/4/00

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By Tiffany Turner

Typed Name: Tiffany Turner

Respectfully submitted,

Bin Zhang, et al.

By Thomas X. Li

Thomas X. Li

Attorney/Agent for Applicant(s)

Reg. No. 37,079

Date: 10/4/00

Telephone No.: (650) 857-5972

For

## AGGREGATED CLUSTERING METHOD AND SYSTEM

Inventors:

Bin Zhang  
Igor Kleyner  
Meichun Hsu

Country	Year	Population (millions)	Urban population (millions)	Urban population (%)	Population density (per sq km)	Urban population density (per sq km)	Population growth rate (%)	Urban population growth rate (%)	Life expectancy at birth (years)	Infant mortality rate (per 1,000 live births)	Sex ratio (males per 100 females)	Sex ratio (urban per 100 females)
Algeria	1980	11.5	5.5	48	100	1,800	1.8	2.5	65	40	105	105
Algeria	1985	12.5	6.5	52	110	2,000	2.0	2.8	66	38	105	105
Algeria	1990	13.5	7.5	55	120	2,200	2.2	3.0	67	36	105	105
Algeria	1995	14.5	8.5	59	130	2,400	2.4	3.2	68	34	105	105
Algeria	2000	15.5	9.5	61	140	2,600	2.6	3.4	69	32	105	105
Algeria	2005	16.5	10.5	64	150	2,800	2.8	3.6	70	30	105	105
Algeria	2010	17.5	11.5	66	160	3,000	3.0	3.8	71	28	105	105
Algeria	2015	18.5	12.5	68	170	3,200	3.2	4.0	72	26	105	105
Algeria	2020	19.5	13.5	69	180	3,400	3.4	4.2	73	24	105	105
Algeria	2025	20.5	14.5	71	190	3,600	3.6	4.4	74	22	105	105
Algeria	2030	21.5	15.5	72	200	3,800	3.8	4.6	75	20	105	105
Algeria	2035	22.5	16.5	73	210	4,000	4.0	4.8	76	18	105	105
Algeria	2040	23.5	17.5	75	220	4,200	4.2	5.0	77	16	105	105
Algeria	2045	24.5	18.5	76	230	4,400	4.4	5.2	78	14	105	105
Algeria	2050	25.5	19.5	77	240	4,600	4.6	5.4	79	12	105	105
Algeria	2055	26.5	20.5	78	250	4,800	4.8	5.6	80	10	105	105
Algeria	2060	27.5	21.5	79	260	5,000	5.0	5.8	81	8	105	105
Algeria	2065	28.5	22.5	80	270	5,200	5.2	6.0	82	6	105	105
Algeria	2070	29.5	23.5	81	280	5,400	5.4	6.2	83	4	105	105
Algeria	2075	30.5	24.5	82	290	5,600	5.6	6.4	84	2	105	105
Algeria	2080	31.5	25.5	83	300	5,800	5.8	6.6	85	0	105	105
Algeria	2085	32.5	26.5	83	310	6,000	6.0	6.8	86	0	105	105
Algeria	2090	33.5	27.5	83	320	6,200	6.2	7.0	87	0	105	105
Algeria	2095	34.5	28.5	84	330	6,400	6.4	7.2	88	0	105	105
Algeria	2100	35.5	29.5	84	340	6,600	6.6	7.4	89	0	105	105
Algeria	2105	36.5	30.5	84	350	6,800	6.8	7.6	90	0	105	105
Algeria	2110	37.5	31.5	84	360	7,000	7.0	7.8	91	0	105	105
Algeria	2115	38.5	32.5	85	370	7,200	7.2	8.0	92	0	105	105
Algeria	2120	39.5	33.5	85	380	7,400	7.4	8.2	93	0	105	105
Algeria	2125	40.5	34.5	85	390	7,600	7.6	8.4	94	0	105	105
Algeria	2130	41.5	35.5	86	400	7,800	7.8	8.6	95	0	105	105
Algeria	2135	42.5										

## AGGREGATED CLUSTERING METHOD AND SYSTEM

### Field of the invention

5           The present invention relates generally to data clustering and more specifically to a method and system for aggregated data clustering.

### Background of the Invention

10           Data clustering operates to group or partition a plurality of data points into a predetermined number of clusters or categories based on one or more attributes or features. The efficiency of a clustering algorithm depends on several factors. First, the computation resources required to implement the clustering algorithm is an important consideration. It is generally desirable to reduce the time needed to generate results (often referred to as the convergence rate) and also reduce the amount of computer resources needed to implement the clustering algorithm.

15           Furthermore, as explained in greater detail hereinafter, the prior art methods do not have a very efficient convergence rate.

20           Second, the quality of the generated clusters or categories (often referred to as the convergence quality) is also another important consideration. Ideally, there is one center point for each category or cluster. Unfortunately, the prior art methods often generate clusters or categories with more than one center. These centers are referred to as "trapped centers" (i.e., these centers are trapped by the local data, but actually belong to another cluster or category).

          There are many practical and useful applications that can utilize data clustering to improve results. Consequently, there is much interest in developing clustering algorithms or methods that efficiently and effectively cluster data.

## PRIOR ART DATA CLUSTERING METHODS

K-Means is a well-known prior art method for data clustering. The K-Means clustering algorithm is further described in J. MacQueen, "Some Methods for Classification and Analysis of Multivariate Observations," pages 281-297 in: L. M. Le Cam & J. Neyman [eds.] Proceedings of the Fifth Berkeley Symposium on Mathematical Statistics and Probability, Vol. 1, University of California Press, Berkeley, 1967 and Shokri Z. Selim and M. A. Ismail, "K-Means Type of Algorithms: A Generalized Convergence Theorem and Characterization of Local Optimality," IEEE Transactions on Pattern Analysis and Machine Intelligence, Vol. PAMI-6, No.1, 1984. Unfortunately, both of these approaches are limited to moving a single data point at one time from one cluster to a second cluster.

Data points do not "move" in the physical sense, but each data point's membership in a particular cluster, which is defined by a center point, changes. For example, when a data point that is a member in a first cluster is "moved" to a second cluster, a performance function is evaluated based on the data points and center points before and after the move. One aspect of the clustering algorithm is to determine whether such a "move" reduces the performance function (i.e., whether the "move" improves the clustering results).

It is to be appreciated that moving one data point at a time between two clusters is inefficient especially when many thousands, tens of thousands of data points, or more need to be moved. One can analogize this situation with a more common example of negotiating the best price for an automobile.

Consider an example when a seller and a buyer are separated by a difference of five thousand dollars between an initial offer price (e.g., \$10,000) and a counter offer price (e.g., \$15,000). During this stage of the negotiations, it would be very inefficient if the buyer's second offer is \$10,000.01 and the seller counters with \$14,999.99. In fact, if the negotiations were to continue one cent at a time, it is apparent that both the seller and buyer would be negotiating for a long time to come before reaching any type of agreement. Consequently, the speed at which an agreement is reached one cent at a time is very slow at best.

Instead, it would be more efficient, and one would expect the buyer in real life to move perhaps by a thousand dollars or more in the second offer by offering, for example, \$11,000. Similarly, one would expect the seller to move perhaps a thousand dollars in a counter offer by countering with \$14,000. Perhaps, when the buyer and seller were only one thousand dollars apart, the buyer and seller would then start negotiating in increments of hundreds of dollars. Similarly, when the buyer and seller were only one hundred dollars apart from reaching an agreement, both would begin to negotiate in increments of single dollars and then in cents.

The inefficient negotiation strategy of moving one cent at a time, regardless of how far apart the parties are, is comparable to what is currently being performed by prior art clustering methods. Since prior art methods are limited to moving a single data point per iteration, this is similar to negotiating on a per penny basis when in fact the parties (e.g., data points and center points) are thousands of dollars apart.

From the above example, it can be appreciated that a mechanism to move more than one data point at a time is desirable. Unfortunately, there is no mechanism for moving more than one data point at a time without losing precision. In fact, if the prior art approaches were to move more than one point at a time, there is no method that exists to quantify the amount of error

[illegible][illegible]

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a clustering method and system that is capable of simultaneously moving more than one data point from a first cluster to a second cluster.

5 It is a further object of the present invention to provide a clustering method and system for moving more than one data point at a time from a first cluster to a second cluster while preserving the monotone convergence property (i.e., the property that the performance function decreases after every move that is made of data points between two clusters).

10 It is a further object of the present invention to provide a clustering method and system that provides a predetermined metric for evaluating the move of more than one data point between two clusters, where the predetermined metric includes the geometric center of the set of data points currently being evaluated for move.

15 It is yet another object of the present invention to provide a clustering method and system that provides a procedure for updating the performance function without losing precision or using approximations.

20 An aggregated data clustering method and system. First, the data points to be clustered and a size parameter are received. The size parameter specifies the number of data points to be moved at one time in the clustering algorithm. Next, the data points are clustered by using an aggregated clustering algorithm (e.g., aggregated local K-Means clustering algorithm) and the size parameter to generate clustered results. Then, a determination is made whether or not the clustered results are satisfactory. If the clustered results are satisfactory, the clustering is stopped. Otherwise, a modified or refined parameter size is received. For example, a user can decrease the parameter size to reduce the number of data points that are moved from a first

cluster to a second cluster at one time. Then, clustering is performed on the clustered results generated previously by using the aggregated clustering algorithm and the revised or refined parameter size. The steps of determining, modifying the parameter size, and aggregated clustering are repeated until satisfactory clustering results are achieved.

03/03/2025 10:00:00 AM





### DETAILED DESCRIPTION

In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring the present invention. The following description and the drawings are illustrative of the invention and are not to be construed as limiting the invention.

### DATA CLUSTERING APPLICATION

Before delving into the details of the aggregated clustering method and system of the present invention, an exemplary application is first described to familiarize the reader with concepts related to the invention.

As noted previously, clustering seeks to locate dense regions of data that have similar attributes or features and generate categories or clusters of these "similar" data points. These attributes or features can be a qualitative (e.g., similar behavior, tastes, likes, dis-likes of consumers), or a quantitative measure (e.g., the number of items purchased by customers across a predefined time period).

FIG. 1 is an exemplary set of data points that are grouped into a plurality of clusters that can be the input to the aggregated clustering method of the present invention. As a departure from prior art clustering methods, the aggregated clustering method and system of the present invention moves more than a single data point at one time during the clustering (i.e., changes membership of more than one data point from a first cluster to a second cluster at one time). Specifically, the aggregated clustering method of the present invention can move a plurality of

data points, such as a subset U, from a first cluster (e.g., cluster A) to a second cluster (e.g., cluster B) at one time without the loss of precision. In fact, as explained in greater detail hereinafter, a user can flexibly specify the number of data points in the subset U to be moved at one time by using an input referred to as a parameter size.

5 For example, the set of data points can represent a plurality of car brokers or dealers. This exemplary application uses two attributes or features for the clustering. The first attribute is the number of sedans that the particular dealer has sold in the last year, and the second attribute is the number of sports cars, the particular dealer has sold in the last year.

10 This particular application seeks to group the car dealers into clusters, such as a first cluster (e.g., cluster A) of car dealers that are particularly good at selling sedans, a second cluster (e.g., cluster B) of car dealers that are particularly good at selling sports cars, and perhaps a third cluster (e.g., cluster C) of car dealers that are good at selling both sports cars and sedans.

15 Center-based clustering algorithms operate by receiving the number of desired clusters, initialization information (e.g., the random initial positions of centers), and based thereon generates center points that are at the center of clusters of data. In this case, since there are three desired clusters, three center points with initial points are provided to the clustering algorithm.

20 Ideally, a good clustering method moves the center positions to the three clusters of data (i.e., a first center is moved to the center of those car dealers that sell high numbers of sedans, a second center is moved to the center of those car dealers that sell high numbers of sports cars, and a third center is moved to the center of the car dealers that sell a high number of both sports cars and sedans.

### Clustering Method

FIG. 2 is a flowchart illustrating an aggregated clustering method according to one embodiment of the present invention. In step 204, the data points to be clustered and a size parameter are received. The size parameter specifies the number of data points to be moved at one time in the clustering algorithm. In step 208, the data points are clustered using the size parameter to generate clustered results.

In step 214, a determination is made whether or not the clustered results generated in step 208 are satisfactory. A determination of whether results are satisfactory can vary across applications and depend on the specific requirements of the particular application. Typically, one or more well-known metrics is utilized to determine if the clustered results meet a particular requirement. Steps 208 and 214 are described in greater detail hereinafter with reference to FIG. 3.

When the clustered results are satisfactory, the clustering stops. Otherwise, when the clustered results are not satisfactory, a modified or refined parameter size is received. For example, a user can decrease the parameter size to reduce the number of data points that are moved from a first cluster to a second cluster at one time. By so doing, the granularity of the clustering is increased. One advantage of the present invention is that the user can flexibly select or vary the size parameter to suit a particular clustering application. For example, with a large data set, a user can set the size parameter at a large value such as 1000 for the first iteration, a smaller value, such as 500 for the second iteration, a yet smaller value, such as 100 in a third iteration, etc. In this manner, the aggregated clustering of the present invention allows a user to selectively adjust the granularity of the clustering for each iteration, thereby increasing the efficiency and convergence rate of the clustering.

Furthermore, since the user is not limited to moving a single data point at one time as in the prior art clustering methods, the present invention provide the user the ability to tailor the granularity of the clustering based on the requirements of a particular application.

In step 228, clustering is performed on the clustered results generated by step 208 by using the revised or refined parameter size. Steps 214 through step 228 are repeated until satisfactory clustering results are achieved.

#### Aggregated Clustering System 400

FIG. 4 illustrates an aggregated clustering system 400 that is configured in accordance with one embodiment of the present invention. The aggregated clustering system 400 includes a move determination unit 404 for evaluating whether an aggregated move of the specified number of data points at one time is possible and enhances the clustering results. The system 400 also includes an aggregated move unit 408 that is coupled to the move determination unit 404 to receive a geometric center 416 of the current set of data points and input information. For example, the move unit 408 updates the first partition count 450, the second partition count 460, the first partition center 454, and the second partition center 464 as described in greater detail hereinafter. Based on these inputs, the move unit 408 accomplishes the move from a first cluster to a second cluster after the move determination unit 404 determines that the aggregated move is needed.

The move determination unit 404 includes a first input for receiving the data points 430 that are partitioned into a plurality of initial partitions and a second input for receiving center points 434. As described in greater detail hereinafter, the partitions, center points of the partitions, and the number of data points in each partition (i.e., the count for each partition) may be updated for each iteration of the clustering in accordance with teachings of the present

invention. The move determination unit 404 also includes a third input for receiving the parameter size 438 (i.e., the number of data points to move at one time), a fourth input for receiving information concerning the first partition (i.e., the move from partition) and the second partition (i.e., the move to partition). For example, this information can include the current count 450 of the first partition, the current center 454 of the first partition, the current count 460 of the second partition, and the current center 464 of the second partition.

The move determination unit 404 includes a move evaluation mechanism 412 for evaluating whether a set of data points should be moved from a first cluster to a second cluster. Preferably, the move evaluation mechanism 412 utilizes a predetermined metric 413 for performing the move evaluation. As described in greater detail hereinafter, the predetermined metric 413 can employ a geometric center of the data points considered for move.

The move determination unit 404 also includes a geometric center determination unit 414 for generating the geometric center of the data points to be moved at one time based on the data points in the partitions. As noted previously, the move determination unit 404 uses the geometric center in the move evaluation of a current set of data points. For example, the predetermined metric can include the geometric center of the set of data points evaluated for move. The geometric center of data points is also provided to the aggregated move unit 408 for use in updating the partitions.

The aggregated move unit 408 includes a count update unit 470 for updating the count of the first partition and count of the second partition to accurately reflect the partition counts after the aggregated move. The aggregated move unit 408 also includes a center update unit 474 for updating the center of the first partition and center of the second partition to accurately reflect the partition centers after the aggregated move.

For example, the count update unit 470 adjusts the count for the Move\_From partition and the count for the Move\_To partition to generate a first partition (FP) count update and second partition (SP) count update, respectively. Specifically, the count for the Move\_From partition is decremented by the number of data points involved in the move. Similarly, the count for the Move\_To partition is incremented by the number of data points involved in the move. The center update unit 474 adjusts the center of the Move\_From partition and the center of the Move\_To partition to generate, for example, first partition (FP) center update and second partition (SP) center update, respectively. Specifically, the center for the Move\_From partition is calculated by using the geometric center of the data points that are being moved. Similarly, the center for the Move\_To partition is calculated by using the geometric center of the data points that are being moved.

These updated partition counts and centers for the first partition and the second partition are then provided to the move determination unit 404 for further move evaluation processing should the current iteration generate clustered results that are not satisfactory.

The aggregated clustering method and system of the present invention moves more than one data point at a time from a first cluster to a second cluster while preserving the monotone convergence property. The monotone convergence property is the property that the performance function decreases after every move that is made of data points between two clusters.

#### Aggregated Clustering

FIG. 3 is a flowchart illustrating in greater detail an aggregated clustering method of according to one embodiment of the present invention. In step 304, K initial center positions are received. Each center is denoted by  $m_k$  where  $k = 1, \dots, K$ , where K is the number of clusters (which is herein referred to also as "partitions"). The number of clusters or partitions can be

specified by and adjusted by a user to suit a particular application by setting a size parameter variable. The initial center points can be random points or the output of some initialization algorithm, which are generally known by those of ordinary skill in the art.

In step 308, a plurality of data points are received and partitioned into a plurality of clusters based on the distance of the data point from a center point of a respective cluster. Each cluster has a center point, and each data point is placed into one of the clusters  $\{S_k\}$  based on a relationship (e.g., the Euclidean distance) between the center point and the data point.

In step 314, at least two data point in a first partition  $S_i$  (e.g., cluster A) are simultaneously evaluated for moving to every other partition (e.g., cluster C and cluster B). For example, subsets of  $U$  points are evaluated by an evaluation expression provided herein below. For example, in the example given in FIG. 1, the size parameter is equal to four. All possible combinations or subsets having four data points from the total eleven data points in cluster A are evaluated for move to cluster B or cluster C.

The index  $i$  is utilized to represent the partition to which a data point  $x$  currently belongs or is a member of, and the index  $j$  is utilized to represent the partition that is currently being evaluated for a potential move to which the data point  $x$  can be moved. The present invention provides the following predetermined metric for evaluating whether a set of data points should be moved from the current partition to a proposed or potential partition:

$$\frac{n_i}{n_i - |U|} |m_U - m_i|^2 - \frac{n_j}{n_j + |U|} |m_U - m_j|^2$$

where  $U$  is the subset of data points ( $U$  is a subset of  $S_i$ ) being evaluated for the move,

$|U|$  is the size of  $U$  that is specified by the size parameter,  $m_U$  is the geometric center of  $U$ ,  $m_i$



and  $m_j$  are the centers of the clusters and  $n_i$  and  $n_j$  are the counts of the clusters.

In decision block 318, a determination is made whether the value generated in step 314 is greater than zero. When the generated value is greater than zero, processing proceeds to step 344. In step 344, the set of data points  $U$  is moved from a current partition  $S_i$  to a second partition  $S_j$ . Moving the set of data points from a current partition to a second partition can involve the following sub-steps. First, the count of each partition needs to be updated. Second, since the membership of both the partitions are changing (i.e., the data points are being moved from the Move\_From partition to the Move\_To partition), the centers of these partitions need to be updated and re-calculated. For accomplishing the move  $U$  from  $S_i$  to  $S_j$ , the count of each partition and the center of each partition needs to be re-calculated to accurately reflect the addition of new data points or the deletion of old data points as the case may be.

For updating the counts of the two partitions, the following expressions can be employed:

$$n_i = n_i - |u|, \text{ and} \\ n_j = n_j + |u|.$$

For updating the centers of these two partitions, the following expressions can be employed:

$$m_i = (n_i * m_i - m_u) / (n_i - |u|), \text{ and} \\ m_j = (n_j * m_j + m_u) / (n_j + |u|).$$

If the value generated in step 314 is not greater than zero, processing proceeds to decision block 324, where a determination is made whether there are more data points to be checked. If there are more data points to be checked, then processing proceeds to step 314.

If there are no more data points to be checked, then processing proceeds to decision block 334. Steps 314, 318, 324, and 344 form a single iteration of the processing. In decision block 334, a determination is made whether any data points were moved (i.e., changed

membership in partitions). When no data points are moved (i.e., when no data point changes membership in the partitions), then the processing is complete and stops (step 338). When one or more data points were moved (i.e., at least one data point changed membership in partitions), then processing proceeds to step 314 to process another iteration (i.e., steps 314, 318, 324 and 5 344).

Alternatively, decision block 334 can have a different stop or termination condition. The stop condition can be whether the change in the performance function is less than a predetermined value.

There are numerous applications that can utilize the aggregated clustering method and system of the present invention to cluster data. For example, these applications include, but are not limited to, data mining applications, customer segmentation applications, document categorization applications, scientific data analysis applications, data compression applications, vector quantization applications, and image processing applications.

The foregoing description has provided examples of the present invention. It will be appreciated that various modifications and changes may be made thereto without departing from the broader scope of the invention as set forth in the appended claims.



(c1\_5) when the value is not greater than zero, determining if there are more subsets to evaluate;  
(c1\_6) when there are more subsets to evaluate, proceeding to step (c1);  
(c1\_7) when there are no more subsets to evaluate, determining whether any point has moved;  
(c1\_8) when a point has moved, proceeding to step (c1); and  
(c1\_9) when no point has moved, stopping the processing.

5. The method of claim 4 wherein each data point has a membership with one cluster; wherein step (c1\_4) further comprises:  
simultaneously updating the membership of at least two data points from the membership of the Move\_From cluster to the membership of the Move\_To cluster.

6. The method of claim 4 wherein step (c1\_4) further comprises:  
updating the count of the Move\_From cluster;  
updating the center of the Move\_From cluster;  
updating the count of the Move\_To cluster; and  
updating the center of the Move\_To cluster.

7. The method of claim 1 wherein revising the size parameter of step (f) further comprises:  
(f\_1) decreasing the size parameter.

8. The method of claim 1 wherein step (d) further comprises:  
(d\_1) employing a predetermined metric for determining whether the clustered results are satisfactory; wherein the predetermined metric includes a geometric center of the subset of points that are being evaluated for move.

9. The method of claim 8 wherein the predetermined metric includes the following expression:

where  $U$  is the subset of data points being evaluated for the move,  $|U|$  is the size of  $U$  that is specified by the size parameter,  $m_{oo}$  is the geometric center of  $U$ ,  $M_i$  and  $m_j$  are the centers of the clusters and  $n_i$  and  $n_j$  are the counts of the clusters.

10. The method of claim 1 wherein the clustering method is utilized in one of a data mining application, customer segmentation application, document categorization application, scientific data analysis application, data compression application, vector quantization application, and image processing application.

11. A clustering system comprising:

- (a) a source of data points to be clustered; and
  - (b) an aggregated clustering module for moving at least two data points at one time between a Move\_From cluster and a Move\_To cluster;
- wherein the aggregated clustering module includes
- a move determination unit for evaluating the move of subsets of data points from each cluster to every other cluster and determining when such a move should be performed; and
  - an aggregated move unit coupled to the move determination unit that updates a Move\_From count, Move\_From center, a Move\_To count, and a Move\_To center.

12. The clustering system of claim 11 wherein the aggregated clustering module further comprises:

- (a) a first input for receiving the data points;
- (b) a second input for receiving initial center points;
- (c) a third input for receiving a number of points to move at one time;
- (d) a parameter for storing the center point associated with each cluster
- (e) a parameter for storing the count of data points associated with each cluster;

wherein the data points, center points and counts, are utilized by the move determination unit for move evaluation and determination and by the aggregated move unit for count update and center update.

13. The clustering system of claim 11 wherein the move determination unit further comprises:

a geometric center determination unit for determining the geometric center of a current subset of data points and providing the geometric center to the move determination unit for move evaluation and move determination.


14. The clustering system of claim 13 wherein the move determination unit further comprises:

a move evaluation mechanism for employing a predetermined metric for move evaluation; wherein the predetermined metric includes the geometric center of a current subset of data points.

15. The clustering system of claim 11 is configured for one of a data mining application, customer segmentation application, document categorization application, scientific data analysis application, data compression application, vector quantization application, and image processing application.

ABSTRACT OF THE DISCLOSURE

An aggregated data clustering method and system. First, the data points to be clustered and a size parameter are received. The size parameter specifies the number of data points to be moved at one time in the clustering algorithm. Next, the data points are clustered by using an aggregated clustering algorithm (e.g., aggregated local K-Means clustering algorithm) and the size parameter to generate clustered results. Then, a determination is made whether or not the clustered results are satisfactory. If the clustered results are satisfactory, the clustering is stopped. Otherwise, a modified or refined parameter size is received. Then, clustering is performed on the clustered results generated previously by using the aggregated clustering algorithm and the revised or refined parameter size. The steps of determining, modifying the parameter size, and aggregated clustering are repeated until satisfactory clustering results are achieved.

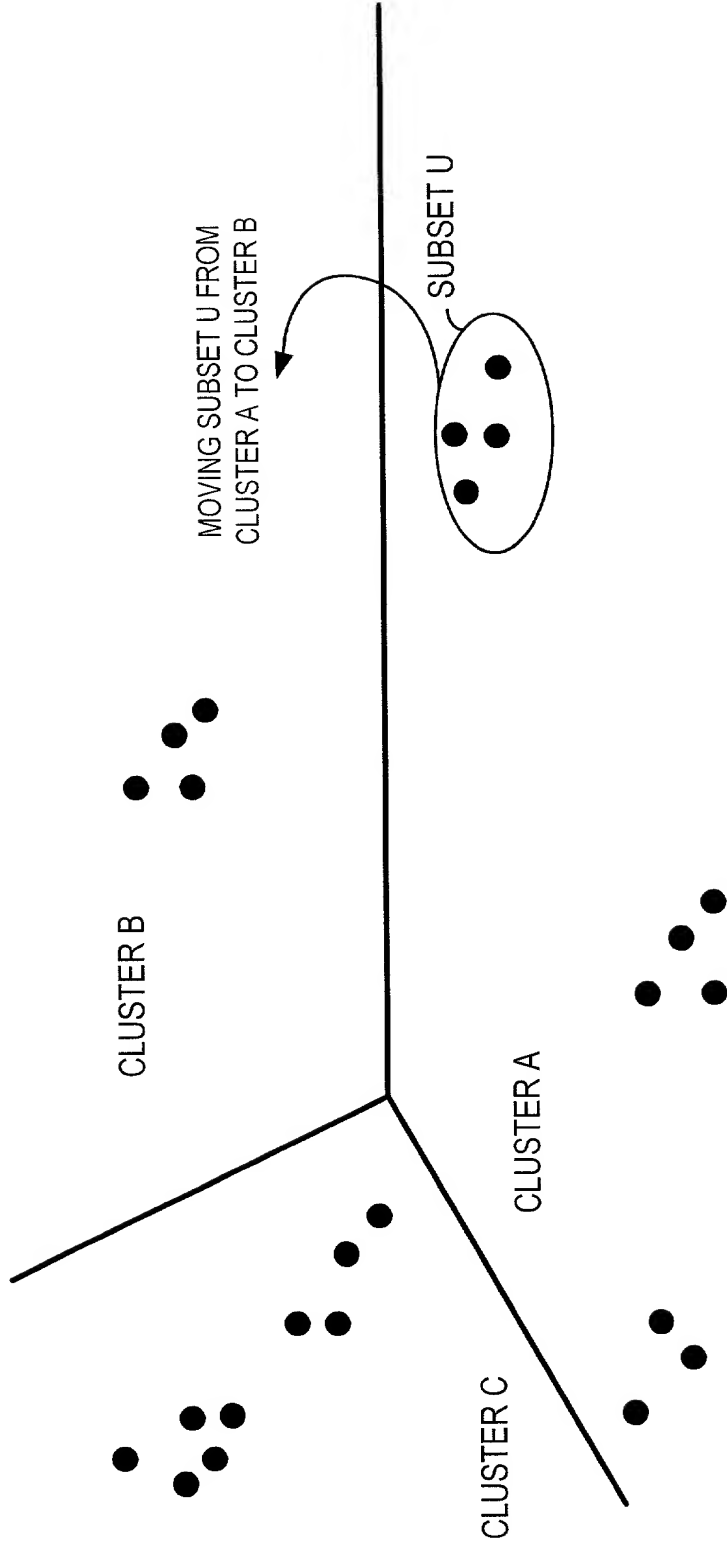

1/4

FIG. 1



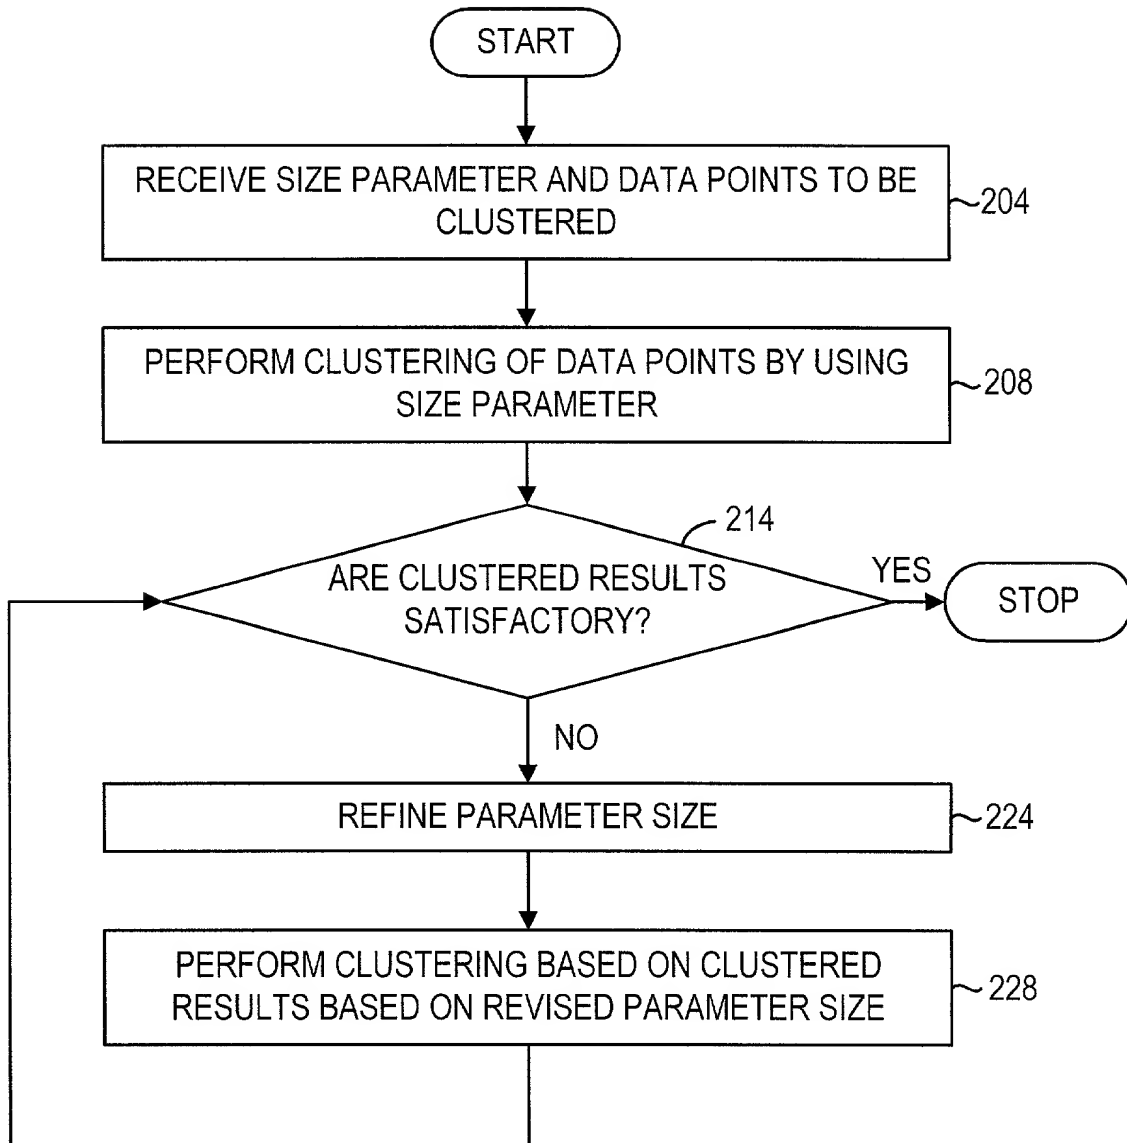


FIG. 2

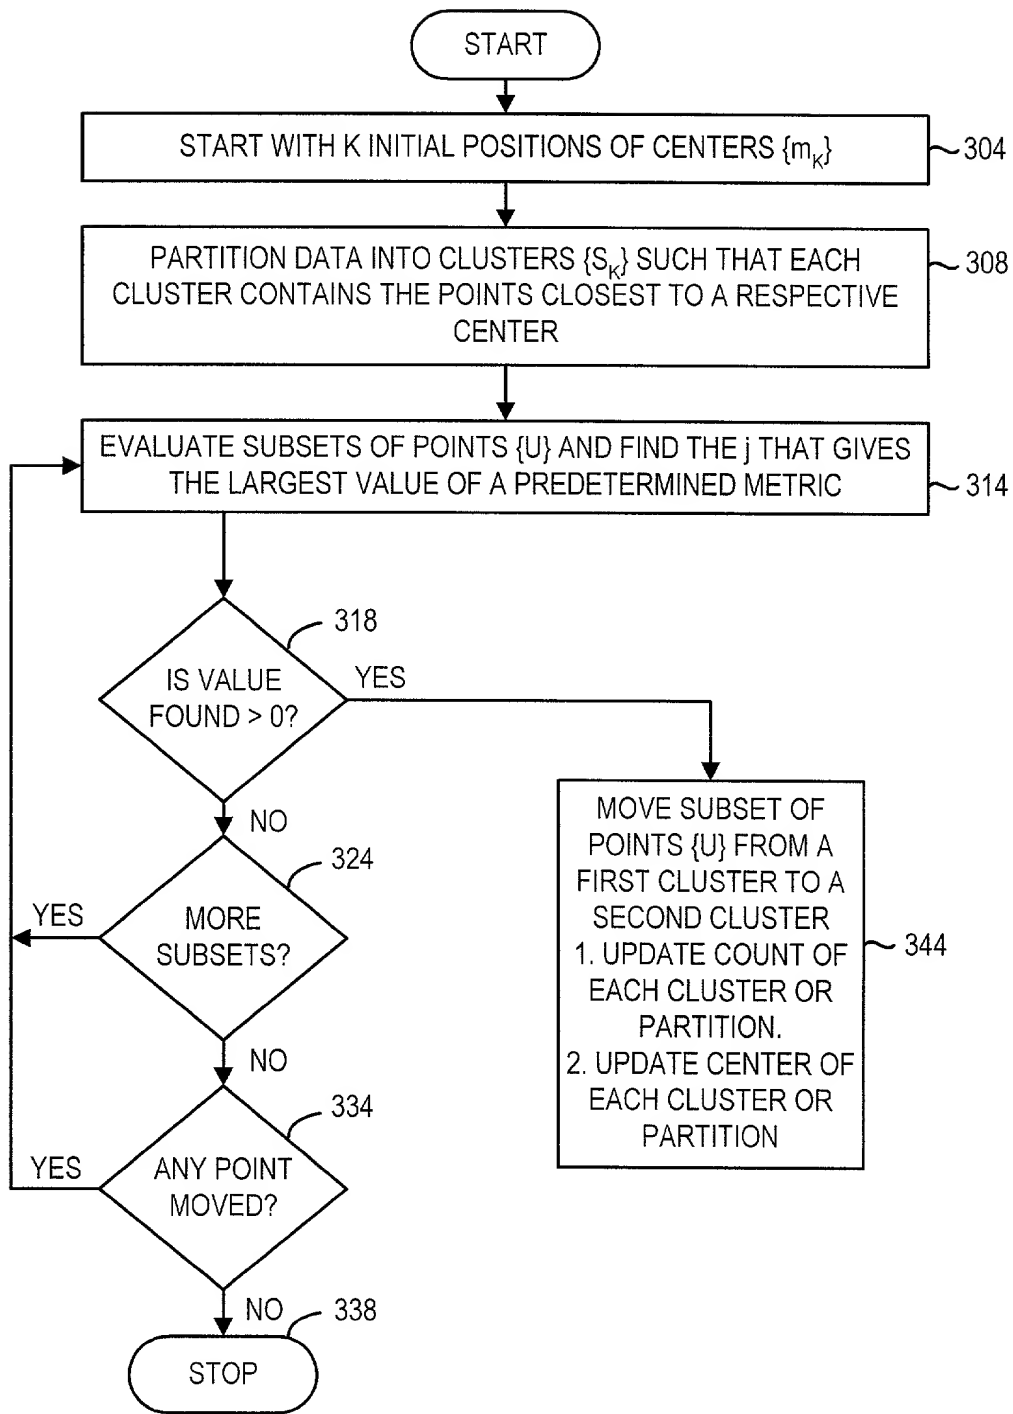


FIG. 3

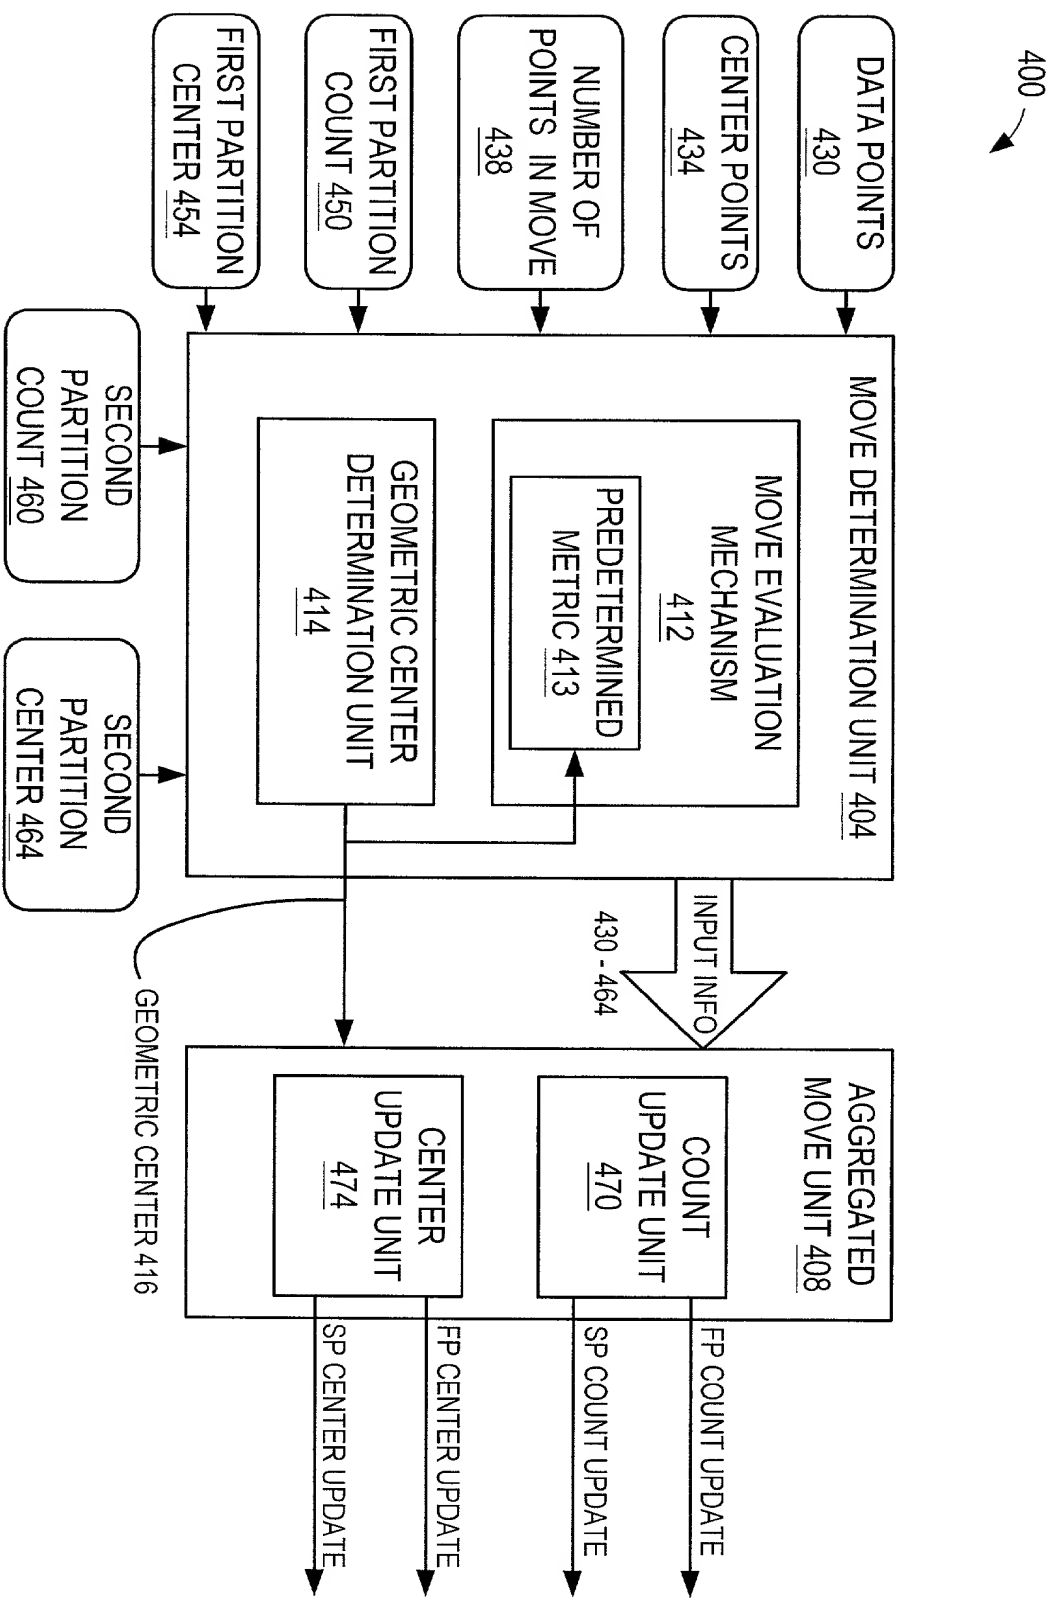


FIG. 4

09694488.100400

DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATIONATTORNEY DOCKET NO. 10992482-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**Aggregated Clustering Method and System**

the specification of which is attached hereto unless the following box is checked:

( ) was filed on \_\_\_\_\_ as US Application Serial No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

**Foreign Application(s) and/or Claim of Foreign Priority**

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
N/A			YES: _____ NO: _____
			YES: _____ NO: _____

**Provisional Application**

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE
N/A	

**U. S. Priority Claim**

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)
N/A		

**POWER OF ATTORNEY:**

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number **022879**

Place Customer  
Number Bar Code  
Label here

Send Correspondence to:  
HEWLETT-PACKARD COMPANY  
Intellectual Property Administration  
P.O. Box 272400  
Fort Collins, Colorado 80528-9599

**Direct Telephone Calls To:**

Thomas X. Li  
(650) 857-5972

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Bin ZhangCitizenship: Switzerland CHINAResidence: 41945 Via San Gabriel, Fremont, CA 94539Post Office Address: Same

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

**DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION (continued)**

ATTORNEY DOCKET NO. 10992482-1

Full Name of # 2 joint inventor: Meichun Hsu Citizenship: US

Residence: 12717 Leander Drive, Los Altos Hills CA. 94022

Post Office Address: Same

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 3 joint inventor: Igor Kleyner Citizenship: US

Residence: 434 Bally Way, Pacifica, CA 94044

Post Office Address: Same

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 4 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 5 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 6 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 7 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 8 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_